

# Comparative Study of Different Quality Assessment Techniques on Color Images

UMME SARA

*Computer Science and Engineering, National Institute of Textile Engineering and Research*

*Abstract -- Image is one of the major particles used in digital image processing. Quality of the images is the standard measure of the experiments to expect the most desirable outcome. Different quality assurance techniques are MSE (Mean Squared Error), PSNR (Peak Signal to Noise Ratio), SSIM (Structural Similarity Index Method) and FSIM (Feature Similarity Index Method). These methods are used to maintain the quality of images and correct the noise from images with the help of filters. These Techniques are applied depending on the benchmark of structural and feature similarity between the original and obtained images.*

*Index Terms- Image Quality, Computer Simulation, Gaussian noise, Gaussian Filter.*

## I. INTRODUCTION

Image Quality Assessment (IQA) is considered as a characteristic property of an image. Degradation of perceived images is measured by image quality assessment. Usually, degradation is calculated compared to an ideal image.

Image quality can be described technically as well as can also be determined by objectives to indicate the deviations from the ideal or perfect models. It also relates to the subjective perception or prediction of an image. Example: an image of a human look [1], [2].

The reduction of the quality of an image is affected by the noise. This noise depends on how it correlates with the information the viewer seeks in the image.

There are several techniques and metrics available to be used for image quality assessment. These techniques are grouped into three categories based on the availability of a reference image [3]. The categories are:

Full-Reference (FR) approaches –The FR approaches focus on the assessment of the quality of a test image in comparison with a reference image. This reference image is considered as the perfect quality image. Example: original image compared to the JPEG-compressed image.

Reduced-Reference (RR) approaches – The RR approaches focus on the assessment of the quality of a test and the reference image. The comparison between the test and reference image depends on the features extracted from the both images. No-Reference (NR) approach – The NR metrics focus on the assessment of the quality of a test image only. No reference image is used in this method. Image quality metrics are also categorized to measure a specific type of degradation such as blurring, blocking, ringing, or all possible distortions of signals.

A full-Reference (FR) image quality measurement technique SSIM which calculates the mean SSIM value and compares to the MSE and PSNR figures are focused in this paper.

The mean squared error (MSE) is the most widely used and also the simplest full reference metric which is calculated by the squared intensity differences of distorted and reference image pixels and averaging them with the peak signal-to-noise ratio (PSNR) of the related quantity.

Image quality assessment metrics such as MSE, PSNR are mostly applicable as they are simple to calculate, clear in physical meanings, and also convenient to implement mathematically in the optimization context. But they are sometimes very mismatched to perceive visual quality. In that case we have taken into account the most effective method structured similarity indexing method which gives us the minimum mean

value between the two experimental images where the mean squared error is very high and the PSNR value is rather countable comparing to MSE.

In this paper, we will compare the SSIM, MSE and PSNR values between the two images (an original and a recovered image) on the basis of the minimum error rate.

## II. OBJECTIVES OF QUALITY ASSESSMENT OF IMAGES

Image quality assessment technique is used to measure the degradation of the recovered image compares to its primary version. Practically there are two kinds of evaluation: subjective and objective [4]. Subjective evaluation is not convenient, time-consuming and also expensive to implement. Afterwards the objective image quality metrics are developed on the basis of different aspects. The most commonly used objective image quality measures are MSE, PSNR, and SSIM. In this paper, our main focus is on full reference objective quality metrics.

## III. QUALITY MEASUREMENT TECHNIQUES

There are so many image quality techniques largely used to evaluate and assess the quality of images such as MSE (Mean Square Error), UIQI (Universal Image Quality Index), PSNR (Peak Signal to Noise Ratio), SSIM (Structured Similarity Index Method), HVS (Human Vision System), FSIM (Feature Similarity Index Method), etc. In this paper we have worked on SSIM, MSE and PSNR methods.

## IV. MSE (MEAN SQUARED ERROR)

MSE is the most common estimator of image quality measurement metric. It is a full reference metric and the values closer to zero are the better.

It is the second moment of the error. The variance of the estimator and its bias are both incorporated with mean squared error. The MSE is the variance of the estimator in case of unbiased estimator. It has the same units of measurement as the square of the quantity

being calculated like as variance. The MSE introduces the Root-Mean-Square Error (RMSE) or Root-Mean-Square Deviation (RMSD) and often referred to as standard deviation of the variance.

The MSE can also be said the Mean Squared Deviation (MSD) of an estimator. Estimator is referred as the procedure for measuring an unobserved quantity of image. The MSE or MSD measures the average of the square of the errors. The error is the difference between the estimator and estimated outcome. It is a function of risk, considering the expected value of the squared error loss or quadratic loss [4].

Mean Squared Error (MSE) between two images such as  $g(x,y)$  and  $\hat{g}(x,y)$  is defined as

$$e_{\text{mse}} = \frac{1}{MN} \sum_{n=0}^M \sum_{m=1}^N [\hat{g}(n,m) - g(n,m)]^2$$

Mean squared error depends on the image scaling intensity. We can express it in dB scale as  $10 \log_{10} [e_{\text{mse}}]$ .

## V. PSNR (Peak Signal-to-Noise Ratio)

PSNR is used to calculate the ratio between the maximum possible signal power and the power of the distorting noise which affects the quality of its representation. This ratio between two images is computed in decibel form. The PSNR is usually calculated as the logarithm term of decibel scale because of the signals having a very wide dynamic rang. This dynamic range varies between the largest and the smallest possible values which are changeable by their quality.

The Peak signal-to-noise ratio is the most commonly used quality assessment technique to measure the quality of reconstruction of lossy compression codecs such as image compression. The signal is considered as the original data and the noise is the error yielded by the compression or distortion. The PSNR is the approximate estimation to human perception of

reconstruction quality compared to the compression codecs [5].

In quality degradation image and video compression, the PSNR value varies from 30 to 50 dB for 8-bit data representation and from 60 to 80 dB for 16-bit data [6], [7]. In wireless transmission, accepted range of quality loss is approximately 20-25 dB [8], [9].

PSNR is expressed as:

$$PSNR = 10 \log_{10} \left( \frac{peakval^2}{MSE} \right)$$

## VI. STRUCTURAL SIMILARITY INDEX METHOD (SSIM)

Structural Similarity Index Method is a perception-based model. In this method, image degradation is considered as the change of perception in structural information. It also collaborates some other important perception-based fact such as luminance masking, contrast masking, etc. The term structural information emphasizes about the strongly inter-dependent pixels or spatially closed pixels. This strongly inter-dependent pixel refers some more important information about the visual objects in image domain. Luminance masking is a term where the distortion part of an image is less visible in the edges of an image. On the other hand contrast masking is a term where distortions are also less visible in the texture of an image.

SSIM estimates the perceived quality of images and videos. It measures the similarity between two images - the original and the recovered. This method is applied as a full reference metric. The term full reference means the prediction of image quality depends on distortion free image which is used as reference image to assess quality.

### A. MS-SSIM (Multi Scale SSIM)

There is an advanced version of SSIM called Multi Scale Structural Similarity Index Method (MS-SSIM) that evaluates various structural similarity images at different image scale. In MS-SSIM, two images are

compared to the scale of same size and resolutions. As Like as SSIM, change in luminance, contrast and structure are considered to calculate multi scale structural similarity between two images. Sometimes it gives better performance over SSIM on different subjective image and video databases [10], [11], [12].

### B. 3-SSIM (Three Components SSIM)

Another version of SSIM, called a three-component SSIM (3-SSIM) that corresponds to the fact - human visual system observes the differences more accurately in textured regions than the smooth regions. SSIM has three categories of regions such as textures, edges and smoothness of an image. The resulting metric is calculated as a weighted average of structural similarity for these three categories. The proposed weight measuring estimations are 0.5 for edges, 0.25 for texture and 0.25 for smooth regions. It can also be mentioned that a 1/0/0 weight measurement influences the results to be closer to the subjective ratings. This can be implied that, no textures or smooth regions rather edge regions play a dominant role in perception of image quality [13].

### C. DSSIM (Structural Dissimilarity)

There is another distance metric referred as Structural Dissimilarity (DSSIM) deduced from the Structural Similarity (SSIM) can be expressed as:

$$DSSIM_{(x,y)} = \frac{1 - ssim(x,y)}{2}$$

The SSIM index method, a quality measurement metric is calculated based on the computation of three major aspects termed as luminance, contrast and structural or correlation term. This index is a combination of multiplication of these three aspects [12].

Structural Similarity index method can be expressed through these three terms as:

$$SSIM(x,y) = [l(x,y)]^{\alpha} \cdot [c(x,y)]^{\beta} \cdot [s(x,y)]^{\gamma}$$

Here, l is the luminance (used to compare the brightness between two images), c is the contrast (used to differ the ranges between the brightest and darkest region of two images) and s is the structure (used to

compare the local luminance pattern between two images to find the similarity and dissimilarity of the images) and  $\alpha, \beta$  and  $\gamma$  are the positive constants [14].

Again luminance, contrast and structure of an image can be expressed separately as:

$$l(x, y) = \frac{2\mu_x\mu_y + C_1}{\mu_x^2 + \mu_y^2 + C_1}$$

$$c(x, y) = \frac{2\sigma_x\sigma_y + C_2}{\sigma_x^2 + \sigma_y^2 + C_2}$$

$$s(x, y) = \frac{\sigma_{xy} + C_3}{\sigma_x\sigma_y + C_3}$$

Where  $\mu_x$  and  $\mu_y$  are the local means,  $\sigma_x$  and  $\sigma_y$  are the standard deviations and  $\sigma_{xy}$  is the cross-covariance for images  $x$  and  $y$  sequentially. If  $\alpha=\beta=\gamma=1$ , then the index is simplified as the following form:

$$SSIM(x, y) = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_3)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)}$$

We can express it in dB scale as  $10\log_{10} [SSIM(x,y)]$ .

## VII

### FEATURE SIMILARITY INDEX METHOD (FSIM)

Feature Similarity Index Method maps the features and measures the similarities between two images. To describe FSIM we need to describe two topics more clearly. They are: Phase Congruency (PC) and Gradient Magnitude (GM).

#### A. Phase Congruency (PC)

A new method for detecting image features is phase congruency. One of the important point of phase congruency is it is invariant to light variation in images. Besides it is also able to detect more some interesting features. It stresses on the features of the image in the domain frequency.

When the contrast information affects the perception image quality of human vision system, phase congruency is invariant to contrast.

#### B. Gradient magnitude (GM)

The computation of image gradient is a very traditional topic in the digital image processing. Convolution masks used to express the operators of the gradient. There are widely used three kinds of gradient operators as Sobel, Prewitt and Scharro operators. If  $f(x)$  is an image of its horizontal and vertical directions, the partial derivatives are  $G_x(x)$  and  $G_y(x)$  using these three operators then the gradient magnitude of  $f(x)$  can be defined as [15].

$$\sqrt{G_x^2 + G_y^2}$$

#### C. FSIM Algorithm

In this paper we are going to calculate the similarity between two images to assess the quality of images. Let two images are  $f_1$  (test image) and  $f_2$  (reference image) can be denoted by  $PC_1$  and  $PC_2$ . The Phase Congruency (PC) maps extracted from two images  $f_1(x)$  and  $f_2(x)$  and the Magnitude Gradient (GM) maps  $G_1(x)$  and  $G_2(x)$  extracted from the two images too. FSIM can be defined and calculated based on  $PC_1(x)$ ,  $PC_2(x)$ ,  $G_1(x)$  and  $G_2(x)$ . Besides by adding the chrominance information of images into FSIM, an Image Quality Assessment index for gray scale image defined by FSIMC will be obtained.

At first we will calculate the  $PC_1(x)$  and  $PC_2(x)$  and then the similarity measure can be defined as

$$S_{PC}(x) = \frac{2PC_1(x)PC_2(x) + T_1}{PC_1^2(x) + PC_2^2(x) + T_1}$$

Where  $T_1$  is a positive constant which increases the stability of  $S_{pc}$ . Practically  $T_1$  can be calculated based on the PC values of their dynamic ranges. The above equation describes the measurement to determine the similarity of two positive real numbers and its result ranges within (0, 1].

Similarly, the Gradient Magnitude (GM) values  $G_1(x)$  and  $G_2(x)$  are compared and the similarity measure is defined as

$$S_G(x) = \frac{2G_1(x)G_2(x) + T_2}{G_1^2(x) + G_2^2(x) + T_2}$$

Where  $T_2$  is a positive constant which depends on the dynamic range of Gradient Magnitude values. In this paper, both  $T_1$  and  $T_2$  are constant so that the FSIM can be conveniently used.

Now  $S_{PC}(x)$  and  $S_G(x)$  are combined together to calculate the similarity  $S_L(x)$  of  $f_1(x)$  and  $f_2(x)$ .  $S_L(x)$  can be defined as

$$S_L(x) = [S_{PC}(x)]^\alpha \cdot [S_G(x)]^\beta$$

Where the parameters  $\alpha$  and  $\beta$  are used to adjust the relative importance of PC and GM features. In this paper, we set  $\alpha = \beta = 1$  for convenience.

### VII. IMPLEMENTATION

Implementation of PSNR, SSIM, PSNR MSE on some images are shown from Fig. 1 to Fig. 3.

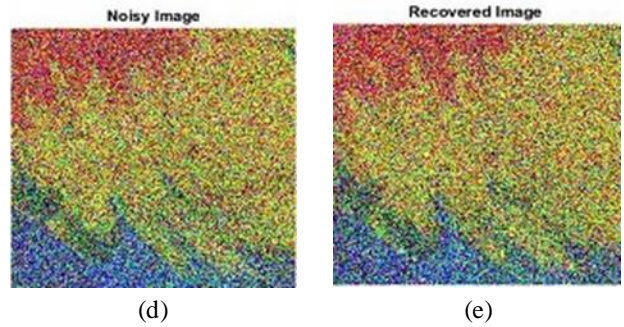
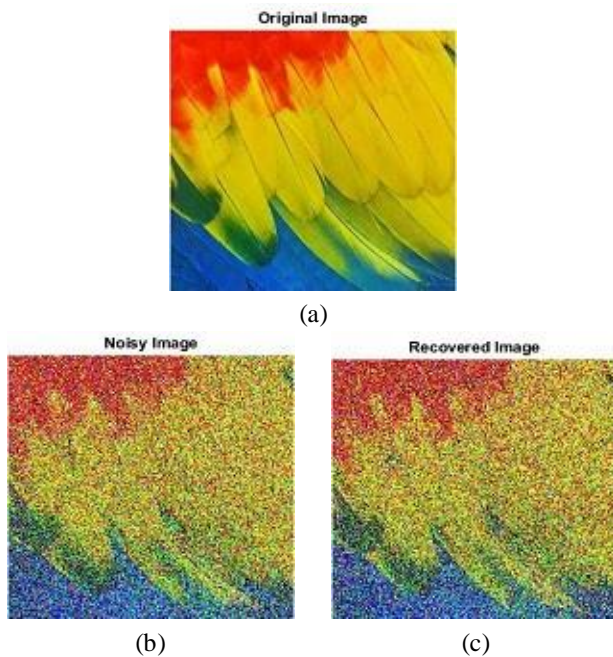


Fig-1

Here, we have used Gaussian noise to the images and filtered by Gaussian Filter. Noise levels are 0.3 and 0.6 sequentially. The MSE, PSNR and SSIM and FSIM values of two images (the original and the recovered image) are listed in the table below.

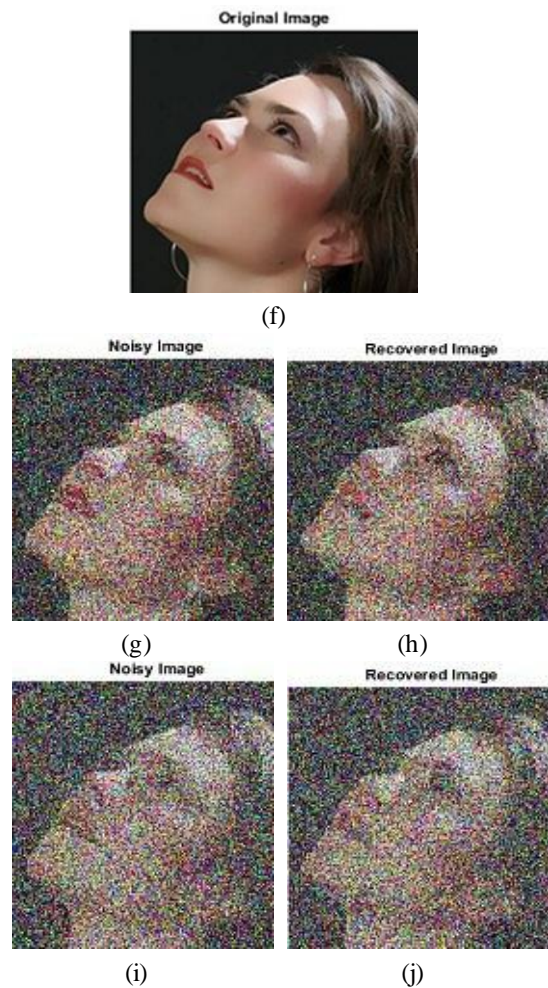


Fig-2

Here, we have used Gaussian noise to the images and filtered by Gaussian Filter.Noise levels are 0.3 and 0.6 sequentially. The MSE, PSNR and SSIM value of two images (the original and the recovered image) are listed in the table below.

| Images | Noise Level (Gaussian-variance) | Quality Assessment Techniques |       |      |       |
|--------|---------------------------------|-------------------------------|-------|------|-------|
|        |                                 | MSE                           | PSNR  | SSIM | FSI M |
| Image1 | 0.3                             | 19.64                         | 18.97 | 0.78 | 0.63  |
|        | 0.6                             | 18.52                         | 17.43 | 0.72 | 0.60  |
| Image2 | 0.3                             | 19.41                         | 19.59 | 0.6  | 0.63  |
|        | 0.6                             | 18.13                         | 18.30 | 0.58 | 0.61  |
| Image3 | 0.3                             | 19.44                         | 20.27 | 0.68 | 0.6   |
|        | 0.6                             | 18.21                         | 19.33 | 0.64 | 0.58  |

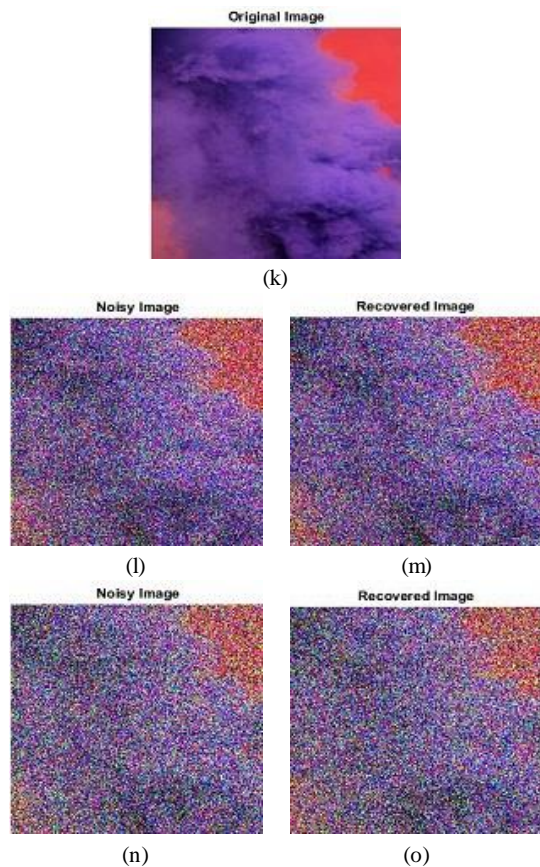


Fig-3

Here, we have used Gaussian noise to the images and filtered by Gaussian Filter.Noise levels are 0.1,0.3 and

0.5 sequentially. The MSE, PSNR and SSIM value of two images (the original and the recovered image) are listed in the table below.

VIII. Result and Discussion

TABLE 1: ERROR DEDUCTION SUMMARY OF QUALITY METRICES

(MSE, PSNR, SSIM and FSIM).

Above table values are depicted by two charts following

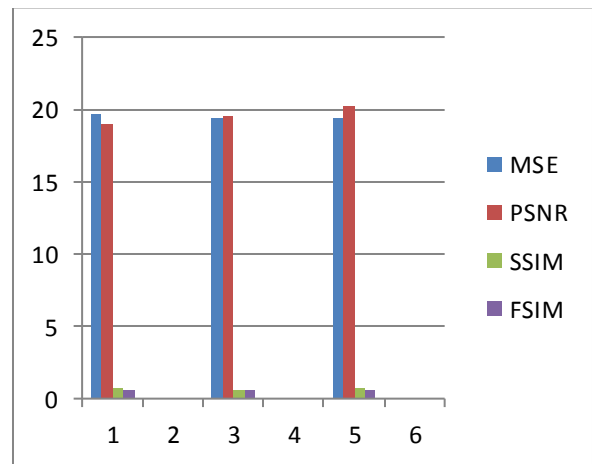


Chart 1: MSE, PSNR, SSIM and PSNR values for Gaussian Noise Variance 0.3

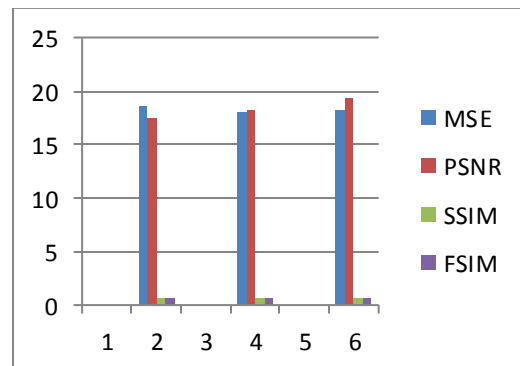


Chart 2: MSE, PSNR, SSIM and PSNR values for Gaussian Noise Variance 0.6

## IX. CONCLUSION

Image Quality Assessment plays a very significant role in digital image processing applications. The three metrics (MSE, PSNR and SSIM and FSIM) are applied in this paper to get the best quality metric. We have done simulating experiments using Gaussian noise through Gaussian filtering technique. The obtained image quality is judged on applying the above metrics. From the results (from both table and chart) we find that FSIM's performance is the best as it is consistent than the others (MSE, PSNR and SSIM).

## REFERENCES

- [1] Kim-Han Thung, Paramesran Raveendran, —A Survey of Image Quality Measures, I IEEE Technical Postgraduates (TECHPOS) international conference, 2009, pp.1-4.
- [2] Anish Mittal, Anush Krishna Moorthy and Alan Conrad Bovik, — No-Reference Image Quality Assessment in the Spatial Domain, I IEEE Transactions on Image Processing, December 2012, vol.21, no.12.
- [3] Al-Najjar, Soong Der Chen, —Comparison of Image Quality Assessment: PSNR, HVS, SSIM, UIQI, I International Journal of Scientific & Engineering Research, August 2012, vol.3, no.3.
- [4] Erich L. Lehmann, George Casella, —Theory of Point Estimation (2nd edition), I Springer, 1998.
- [5] Huynh-Thu, Q. Ghanbari, —Scope of validity of PSNR in image/video quality assessment, I Electronics Letters, February 2008, vol.44, no.13.
- [6] Welstead, T Stephen, —Fractal and wavelet image compression techniques, I SPIE Press, December 1999, vol.TT40, pp. 155–156.
- [7] Anson, L.F., —Fractal Image Compression, I BYTE, October 1993, pp. 195-202.2.
- [8] N. Thomos, N.V. Boulgouris and M.G. Strintzi, —Optimized Transmission of JPEG2000 Streams Over Wireless Channels, I IEEE Transactions on Image Processing, January 2006, vol.15, no.1.
- [9] L. Xiangjun, C. Jianfei, —Robust transmission of JPEG2000 encoded images over packet loss channels, I ICME 2007, pp.947-950, School of Computer Engineering, Nanyang Technological University.
- [10] Zhengfang Duanmu, Kede Ma and Zhou Wang, —Quality-of-Experience of Adaptive Video Streaming: Exploring the Space of Adaptation, I Mountain view, CA, USA, October 2017.
- [11] Richard Dosselmann, Xue Dong Yang, I Signal, Image and Video Processing, March 2011, vol.5, no.1, pp.81–91.
- [12] Zhou Wang, Eero P. Simoncelli and Alan C. Bovik, —Multiscale structural similarity for image quality assessment, I Proceedins of 37th IEEE Asilomar Conference on Signals, Systems and Computers, Pacific Grove, CA, November 2003, vol.2, pp.1398–1402.
- [13] Chaofeng Li, Alan Conrad Bovik, I Journal of Electronic Imaging, January 2010, vol.19, no.1, pp.011003-9.
- [14] Alan C Brooks, Xiaonan Zhao and Thrasyvoulos N Pappas, —Structural similarity quality metrics in a coding context: exploring the space of realistic distortions, I IEEE Transactions on image processing, August 2008, vol.17, no.8, pp. 1261-1273.
- [15] Rohit Kumar, Vishal Moyal, —Visual Image Quality Assessment Technique using FSIM, I International Journal of Computer Applications Technology and Research, vol.2, no. 3, pp. 250 - 254, 2013.