

Traffic Volume Count and Analysis for Madiwal Junction, Bidar

PROF. BASWAKUMAR BIRADAR

Department of Civil Engineering, Guru Nanak Dev Engineering College, Bidar

Abstract -- In this today's world, every person is willing to have their own vehicle. Their willingness led to the gradual growth in the number of vehicles. As per the considerations for the movement of the vehicles, lots of roadways have been constructed with several reinforcement parameters. The place where two or more road network meets, there is a construction of different types of intersections, rotaries/roundabouts. Rotary junction has efficiency to manage the various traffic congestion. Evaluation of rotary junction capacity is very important. As the evaluation of rotary junction is directly related with several traffic and motorist's parameters such as level of service, travel time, delays, accidents, operation costs, environmental factors, etc. So, there should be proper attention for the evaluation and improvements in the rotary junctions. As at the rotary junction, lots of traffic are diverted to different routes as per the travel of motorists. There should be decrease in the congestion, improvement of rotary junctions. Improvement of rotary junction justification have been considering by evaluation of the rotary junction. Traffic volume study is the major study for the evaluation of the traffic condition of the rotary junction. To analyse the traffic volume, traffic survey has been considering in the peak hours on the rotary junction.

Indexed Terms: Traffic Rotaries, PCU (Passenger Car Unit), Traffic Studies, Traffic Volume

I. INTRODUCTION

A. Traffic Volume Study is the number of vehicles crossing a section of road per unit time at any selected period. It is used as a quantity measure of flow. The commonly units are vehicles/day or vehicles/hour. It is used in planning, traffic operation and control of existing facilities and also for planning the new facilities. It is used in the analysis of traffic patterns and trends. Rotary intersections or roundabout are special form of at-grade intersections laid out for the movement of traffic in one direction around a central traffic island. Essentially all the major conflicts at an intersection namely the collision between through and right-turn movements are converted into milder conflicts namely merging and

diverging. The vehicles entering the rotary are gently forced to move in a clockwise direction in orderly fashion. They then weave out of the rotary to the desired direction. The traffic operations at a rotary are three; diverging, merging and weaving. All the other conflicts are converted into these three less severe conflicts.

1. Diverging: It is a traffic operation when the vehicles moving in one direction is separated into different streams according to their destinations.
2. Merging: Merging is the opposite of diverging. Merging is referred to as the process of joining the traffic coming from different approaches and going to a common destination into a single stream.
3. Weaving: Weaving is the combined movement of both merging and diverging movements in the same direction.

B. Design elements:

The design elements include design speed, radius at entry, exit and the central island, weaving length and width, entry and exit widths. In addition, the capacity of the rotary can also be determined by using some empirical formula

1. Design speed:

All the vehicles are required to reduce their speed at a rotary. Therefore, the design speed of a rotary will be much lower than the roads leading to it. Although it is possible to design roundabout without much speed reduction, the geometry may lead to very large size incurring huge cost of construction. The normal practice is to keep the design speed as 30 and 40 kmph for urban and rural areas respectively.

2. Entry, exit and island radius:

The radius at the entry depends on various factors like design speed, super-elevation, and coefficient of friction. The entry to the rotary is not straight, but a small curvature is introduced. This will force the driver to reduce the speed. The entry radius of about 20 and 25 meters is ideal for an urban and rural design respectively.

The exit radius should be higher than the entry radius and the radius of the rotary island so that the vehicles will discharge from the rotary at a higher rate. A general practice is to keep the exit radius as 1.5 to 2 times the entry radius. However, if pedestrian movement is higher at the exit approach, then the exit radius could be set as same as that of the entry radius.

The radius of the central island is governed by the design speed, and the radius of the entry curve. The radius of the central island, in practice, is given a slightly higher radius so that the movement of the traffic already in the rotary will have priority. The radius of the central island which is about 1.3 times that of the entry curve is adequate for all practical purposes.

3. Width of the rotary:

The entry width and exit width of the rotary is governed by the traffic entering and leaving the intersection and the width of the approaching road. The width of the carriageway at entry and exit will be lower than the width of the carriageway at the approaches to enable reduction of speed. IRC suggests that a two-lane road of 7 m width should be kept as 7 m for urban roads and 6.5 m for rural roads. Further, a three-lane road of 10.5 m is to be reduced to 7 m and 7.5 m respectively for urban and rural roads.

The width of the weaving section should be higher than the width at entry and exit. Normally this will be one lane more than the average entry and exit width. Thus, weaving width is given as,

$$W = \left(\frac{e_1 + e_2}{2}\right) + 3.5$$

Where e_1 is the width of the carriageway at the entry and e_2 is the carriageway width at exit.

Weaving length determines how smoothly the traffic can merge and diverge. It is decided based on many factors such as weaving width, proportion of weaving traffic to the non-weaving traffic etc. This can be best achieved by making the ratio of weaving length to the weaving width very high. A ratio of 4 is the minimum value suggested by IRC. Very large weaving length is also dangerous, as it may encourage over-speeding.

4. Capacity:

The capacity of rotary is determined by the capacity of each weaving section. Transportation road research lab (TRL) proposed the following empirical formula to find the capacity of the weaving section.

$$Q_w = \frac{280w[1 + \frac{e}{w}][1 - \frac{p}{3}]}{1 + \frac{w}{l}}$$

Where e is the average entry and exit width, i.e., $\frac{(e_1 + e_2)}{2}$, w is the weaving width, l is the length of weaving, and p is the proportion of weaving traffic to the non-weaving traffic. Figure 40:3 shows four types of movements at a weaving section, a and d are the non-weaving traffic and b and c are the weaving traffic. Therefore,

$$p = \frac{b + c}{a + b + c + d}$$

II. METHODOLOGY

The methodology of the project includes analysis of rotary junction traffic at peak hours, problem definition and goals related to selected rotary, data collection through count of volume capacity and traffic survey and data analysis of the different rotaries.



Fig. 1: Approach and Methodology

III. RESULTS AND DISCUSSION

- Traffic volume count for the Madiwal Junction:

Table 1: Traffic volume Count (No. of vehicles hourly) at Madiwal circle

NO. OF VEHICLES HOURS OF DAY	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
07:00 AM – 08:00 AM	3262	3318	3249	2998	2899	2965	2865
08:00 AM – 09:00 AM	3588	3946	3961	3918	3918	3614	3200
09:00 AM – 10:00 AM	3801	4905	3280	3767	3568	3400	3220
10:00 AM – 11:00 AM	2891	4328	3122	3072	3078	1938	2865
11:00 AM – 12:00 PM	2913	4896	3249	2998	2997	1938	3220
12:00 PM – 01:00 PM	3311	3052	3500	1965	1932	3006	3006
01:00 PM – 02:00 PM	3123	3911	3678	1996	1932	2865	2895
02:00 PM – 03:00 PM	1503	3226	2000	2022	2899	2785	3221
03:00 PM – 04:00 PM	3339	3068	2850	2212	3568	3400	3229
04:00 PM – 05:00 PM	3339	4004	4619	3008	3078	3078	3265
05:00 PM – 06:00 PM	3722	4145	4009	3145	3378	3615	3375
06:00 PM – 07:00 PM	3113	4617	3760	3219	3615	3692	3575
07:00 PM – 08:00 PM	3006	4123	3008	2163	3153	4000	3576
08:00 PM - 09:00 PM	1500	4001	2000	2554	3078	3099	3575
Total	42414	55536	45493	39037	43093	43395	45087

Table 2: Traffic volume Count (Types of vehicles per week) at Madiwal circle

TYPES OF VEHICLES PER WEEK	
Truck	1572
Bus	9348
Car	60466
Auto Rickshaw	64728
Motor Cycle	177820
Bicycle	121
	314055

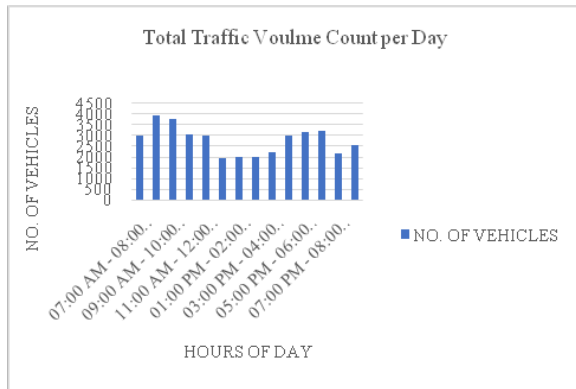


Fig. 2: Total volume count per day at Madiwal circle

Table 3: PCU Value/Week of vehicles at Madiwal circle

Type of vehicle/week	PCU value/week
Truck	5502
Bus	32718
Car	60466
Auto Rickshaw	51782.4
Motor Cycle	88910
Bicycle	24.2
	239402.6

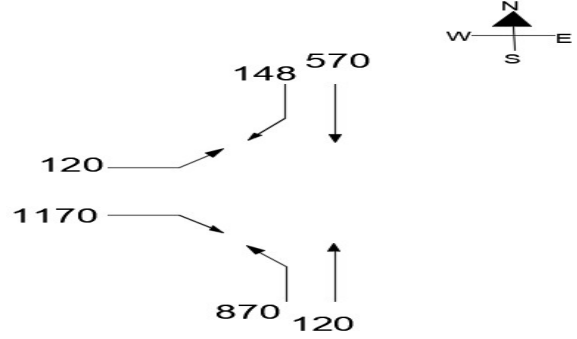


Fig. 3: The traffic in terms of PCUs from each leg is depicted at Madiwal circle

Table 4: Proportion of weaving Traffic at each leg at Madiwal circle

p	ES	SW	WN	NE
a	0	870	120	0
b	0	120	1170	718
c	1740	148	120	0
d	148	0	0	1170

IV. CONCLUSION

The study of Traffic volume count and analysis for Madiwala junction, Bidar conclude that

1. Motorcycles, cars, buses and trucks occupied 57%, 20%, 3% and 0.5% respectively per week
2. Very small percentage of congestion is occurring and need to provide separate auto stand.
3. The Percentage of public transport is less and need to be strengthened.

REFERENCES

- [1] IRC 65:1976, "Recommended Practice for Traffic Rotaries", Indian Road Congress (IRC), New Delhi.
- [2] IRC 93:1985, "Guidelines on Design and Installation of Road Traffic Signals".
- [3] IRC 106:1990, "Guidelines for Capacity of Urban Roads".

- [4] “Traffic Engineering and Transport Planning”
by Kadiyali L R.
- [5] “Highway Engineering” by S. K. Khanna and
C. E. G. Justo.
- [6] International Journal of Research in Science &
Engineering Volume: 3 Issue: 2 March-April
2017.
- [7] International Journal for Scientific Research &
Development Volume: 3 Issue: 06 2015.
- [8] International Journal of Science Technology &
Engineering Volume: 3 Issue: 08 March-April
2017.
- [9] IOP Conf. Series: 14th International
Conference on E-Society, E-Education and E-
Technology (ICSET)-2017.
- [10] International Journal of Engineering &
Technology Volume: 5 Issue: 06 Dec-2015.